

KODAK Solar Module

M72D00 Series

350-370 1500V Series

Bi-Facial Mono Perc Double Glass Module

Key Features



- Capable of absorbing light from both front and rear sides to produce extra electricity with 3-15% more energy yield
- Superior low-irradiance and temperature-dependent performance
- Enhanced reliability and durability with double glass pane encapsulation
- Highly tolerant to harsh environmental conditions and resistant to PID in accordance to IEC62804
- 1500V compliance

Reliable Quality

- Positive power tolerance: 0~+5W
- Modules binned by current to improve system performance

Superior Warranty

- 12-year product warranty
- 30-year linear power output warranty

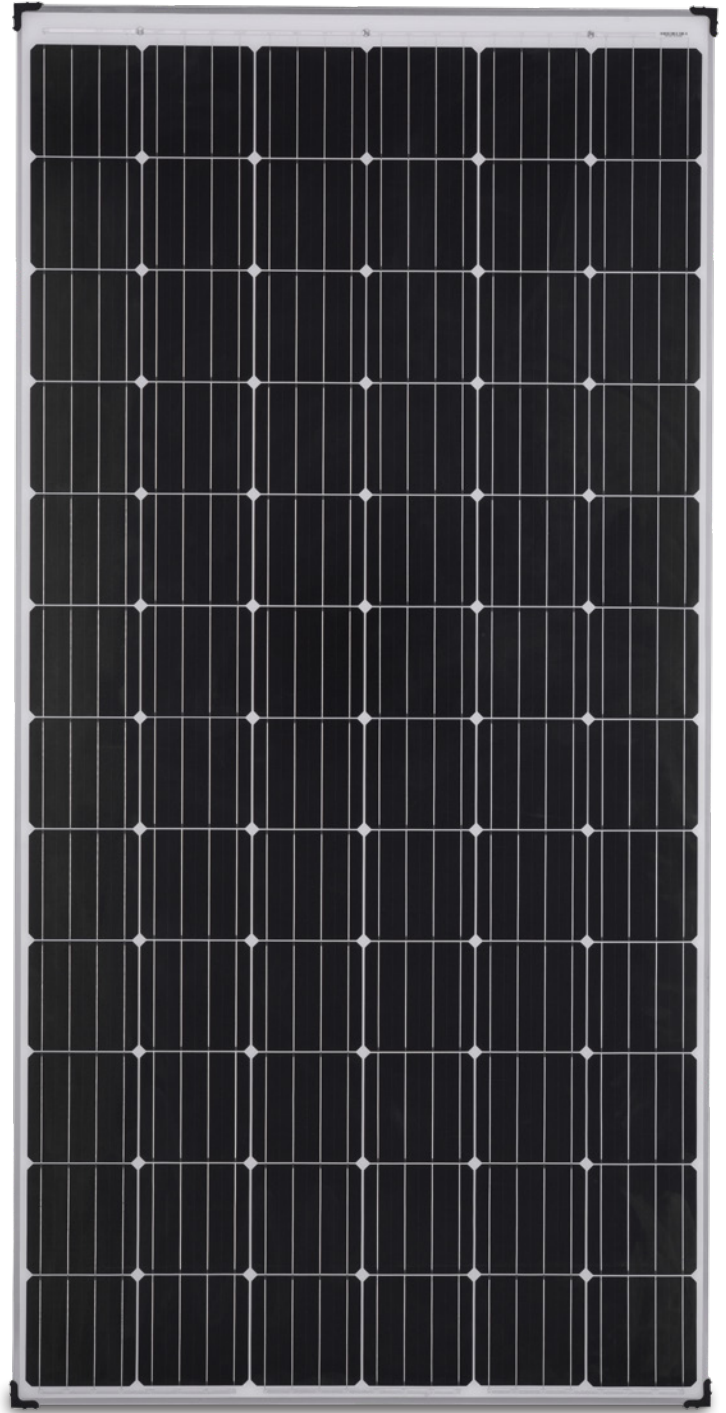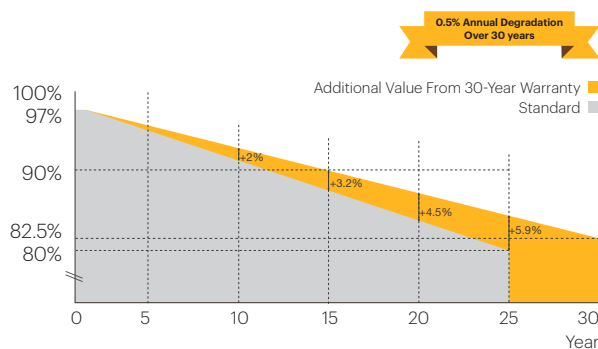


KODAK Solar Module

M72D00 Series

SPECIFICATIONS


Mechanical Diagrams

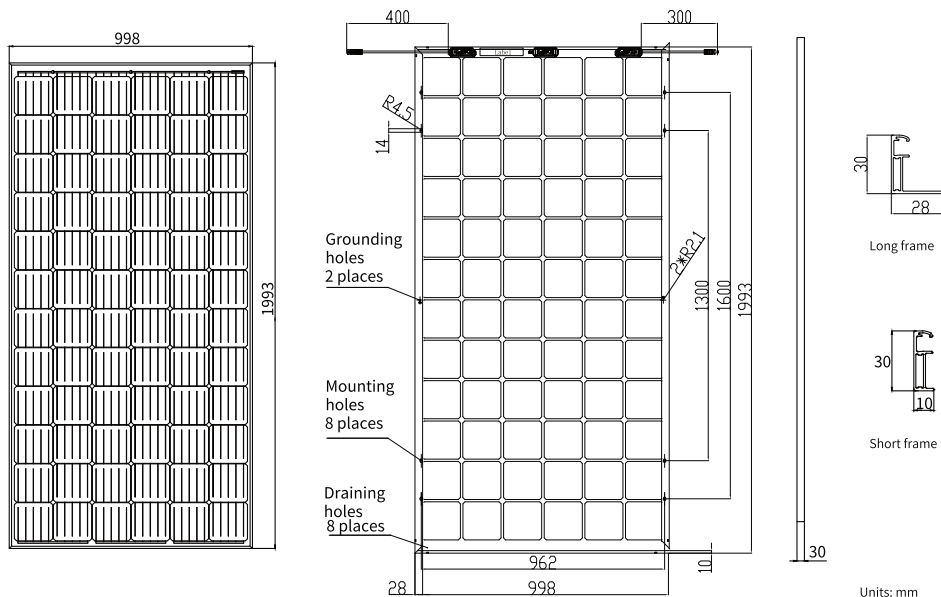


Remark: customized frame color and cable length available upon request

Characteristics


Current-Voltage Curve M72D00-350/BP



Power-Voltage Curve M72D00-350/BP



Current-Voltage Curve M72D00-350/BP



Specifications

Cell	Mono
Weight	28.3kg±3%
Dimensions	1987x992x6mm (1987x992x26mm with junction box)
Cable Cross Section Size	4mm
No. of cells	72 (6x12)
Junction Box	IP67, 3 diodes
Connector	QC 4.10-35
Packaging Configuration	30 Per Pallet

Operating Conditions

Maximum System Voltage	1500V DC (IEC)
Operating Temperature	-40°C~+85°C
Maximum Series Fuse	20A
Maximum Static Load, Front	5400Pa
Maximum Static Load, Back	2400Pa
NOCT	45±2°C
Application Class	Class A
Bifaciality*	>70%

Electrical Parameters at STC

MODEL	M72D00-350/BP	M72D00-355/BP	M72D00-360/BP	M72D00-365/BP	M72D00-370/BP
Rated Maximum Power (Pmax) [W]	350	355	360	365	370
Open Circuit Voltage (Voc) [V]	47.48	47.66	47.84	48.15	48.44
Maximum Power Voltage (Vmp) [V]	39.59	39.76	39.96	40.25	40.53
Short Circuit Current (Isc) [A]	9.53	9.60	9.67	9.74	9.80
Maximum Power Current (Imp) [A]	8.85	8.93	9.01	9.07	9.13
Module Efficiency [%]	17.8	18.0	18.3	18.5	18.8
Power Tolerance			0~+5W		
Temperature Coefficient of Isc (α _{Isc})			+0.060%/°C		
Temperature Coefficient of Voc (β _{Voc})			-0.300%/°C		
Temperature Coefficient of Pmax (γ _{Pmp})			-0.390%/°C		
STC	Irradiance 1000W/m², cell temperature 25°C, AM 1.5G				

Electrical Parameters at NOCT

MODEL	M72D00-350/BP	M72D00-355/BP	M72D00-360/BP	M72D00-365/BP	M72D00-370/BP
Max Power (Pmax) [W]	259	263	266	270	274
Open Circuit Voltage (Voc) [V]	43.68	43.88	44.10	44.41	44.63
Max Power Voltage (Vmp) [V]	35.92	35.94	36.20	36.40	36.60
Short Circuit Current (Isc) [A]	35.92	35.94	36.20	36.40	36.60
Max Power Current (Imp) [A]	7.63	7.70	7.76	7.81	7.78
NOCT	Irradiance 800 W/m², ambient temperature 20, wind speed 1 m/s				

Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

The efficiency of the bifacial PERC glass-glass modules at 200W/m to that at 1000W/m is 98%. *Bifaciality = Pmax,rear/Pmax,front

All information contained in this document is subject to change without notice.



For further information visit www.bluemountainpv.com

© 2020 Blue Mountain Energy Ltd. The Kodak trademark, logo and trade dress are used under license from Kodak. Blue Mountain Energy Ltd., Crown House, 27 Old Gloucester Street, London WC1N 3AX
Made in China