

KODAK Solar Inverters


i0.7S-i3.3S



High Performance Single-MPPT Inverters

i0.7S / i1.0S / i1.5S / i2.0S / i2.5S / i3.0S / i3.3S

- Single MPPT design with precise MPPT algorithm
- 97.4% max. efficiency
- IP65 rated
- Optional export control
- Compact & lightweight
- RS485, WiFi/LAN/GPRS (optional) communications
- Low start-up voltage
- Android & iPhone apps available
- 5 year (extendable) warranty

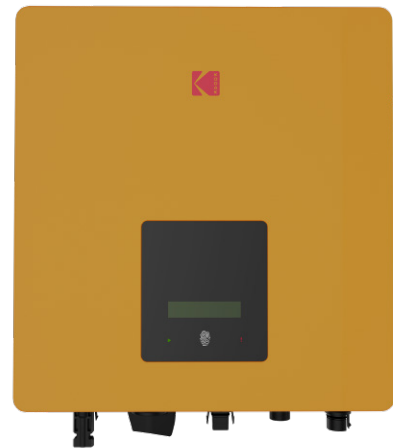

High
Performance



Small &
Compact



IP65
Rated



Remote
Monitoring



KODAK i0.7S-i3.3S

| Model | i0.7S | i1.0S | i1.5S | i2.0S | i2.5S | i3.0S | i3.3S |
|--|--|------------|------------|--|------------|------------|------------|
| INPUT | | | | | | | |
| PV | | | | | | | |
| Max. Recommended DC Power [W] | 910 | 1300 | 1950 | 2600 | 3250 | 3900 | 4290 |
| Max.DC Voltage [V] | 500 | 500 | 500 | 500 | 550 | 550 | 550 |
| Nominal DC Operating Voltage [V] | 360 | 360 | 360 | 360 | 360 | 360 | 360 |
| Max. Input Current [A] | 12.5 | 12.5 | 12.5 | 12.5 | 12.5 | 12.5 | 12.5 |
| Max. Short Circuit Current [A] | 15 | 15 | 15 | 15 | 15 | 15 | 15 |
| MPPT Voltage Range [Vdc] | 50-500 Vdc | 50-500 Vdc | 50-500 Vdc | 50-500 Vdc | 50-550 Vdc | 50-550 Vdc | 50-550 Vdc |
| Start-up Voltage [V] | 60 | 60 | 60 | 60 | 60 | 60 | 60 |
| No. of MPP Trackers | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Strings Per MPP Tracker | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| OUTPUT | | | | | | | |
| AC | | | | | | | |
| Nominal AC Power [W] | 700 | 1000 | 1500 | 2000 | 2500 | 3000 | 3300 |
| Max. Apparent AC Power [VA] | 800 | 1100 | 1650 | 2200 | 2750 | 3300 | 3300 |
| Rated Grid Voltage [Vac] | 220/230/240 | | | | | | |
| Grid Voltage Range [Vac] | 180-276(According to local standard) | | | | | | |
| Rated Grid Frequency [Hz] | 50/60 | | | | | | |
| Grid frequency range [Hz] | 45-55/54-65(According to local standard) | | | | | | |
| Nominal AC Current [A] | 3.0 | 4.3 | 6.5 | 8.7 | 10.9 | 13.0 | 14.3 |
| Max. AC Current [A] | 3.5 | 4.8 | 7.2 | 9.6 | 12.0 | 14.3 | 14.3 |
| Displacement Power Factor | 1 (Adjustable from 0.8 leading to 0.8 lagging) | | | | | | |
| Total Harmonic Distortion (THDi, Nominal output) | <3% | <3% | <3% | <3% | <3% | <3% | <3% |
| EFFICIENCY | | | | | | | |
| MPPT Efficiency | 99.00% | 99.00% | 99.00% | 99.00% | 99.00% | 99.00% | 99.00% |
| Euro-efficiency | 96.50% | 96.50% | 96.50% | 96.80% | 96.80% | 96.80% | 96.80% |
| Max. Efficiency | 97.20% | 97.20% | 97.30% | 97.40% | 97.40% | 97.40% | 97.40% |
| PROTECTION | | | | | | | |
| DC Reverse Polarity Protection | | | | YES | | | |
| Anti-Islanding Protection | | | | YES | | | |
| Insulation Monitoring | | | | YES | | | |
| Residual Current Monitoring | | | | YES | | | |
| AC Short Circuit Protection | | | | YES | | | |
| AC Output Over Current Protection | | | | YES | | | |
| AC Output Over Voltage Protection | | | | YES | | | |
| Surge Protection | | | | YES | | | |
| Temperature Protection | | | | YES | | | |
| Integrated DC Switch | | | | Optional | | | |
| STANDARD | | | | | | | |
| Safety | | | | IEC62109-1-2 | | | |
| EMC | | | | IEC 61000-6-1/IEC 61000-6-2/IEC 61000-6-3 | | | |
| Certification | | | | VDE-AR-N 4105/G98/G99/AS477/EN50549/CEI 0-21 | | | |
| GENERAL DATA | | | | | | | |
| Dimensions (WxHxD) [mm] | | | | 350*334*115 | | | |
| Weight [kg] | | | | 7.8 | | | |
| Cooling Concept | | | | Natural | | | |
| Topology | | | | Transformerless | | | |
| Protection Class | | | | III (AC side), II (PV side) | | | |
| Noise Emission (typical) [dB] | | | | <30 | | | |
| Max. Operating Altitude [m] | | | | 3000 (derating when>2000) | | | |
| Operating Temperature Range | | | | From -20 to +60°C (derating at +45°C) | | | |
| Humidity | | | | 0-100% (No condensation) | | | |
| Self Consumption (night) [W] | | | | <1 | | | |
| Monitoring Module (optional) | | | | External WIFI/Lan/GPRS (optional) | | | |
| Communication | | | | Meter, CT, DRM, ISO alarm | | | |
| Display | | | | LCD screen, Touch Key, App, Website | | | |



For further information visit www.bluemountainpv.com
 © 2020 Blue Mountain Energy Ltd. The Kodak trademark, logo and trade dress are used under license from Kodak. Blue Mountain Energy Ltd., Crown House, 27 Old Gloucester Street, London WC1N 3AX
 Made in China